
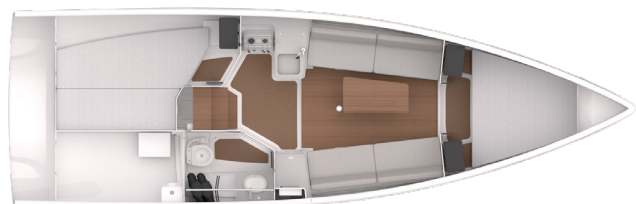


STANDARD CONFIGURATION & OPTIONS SPECIFICATIONS

Version 1.5_EN, August 2026, valid for orders under pricelist A2027

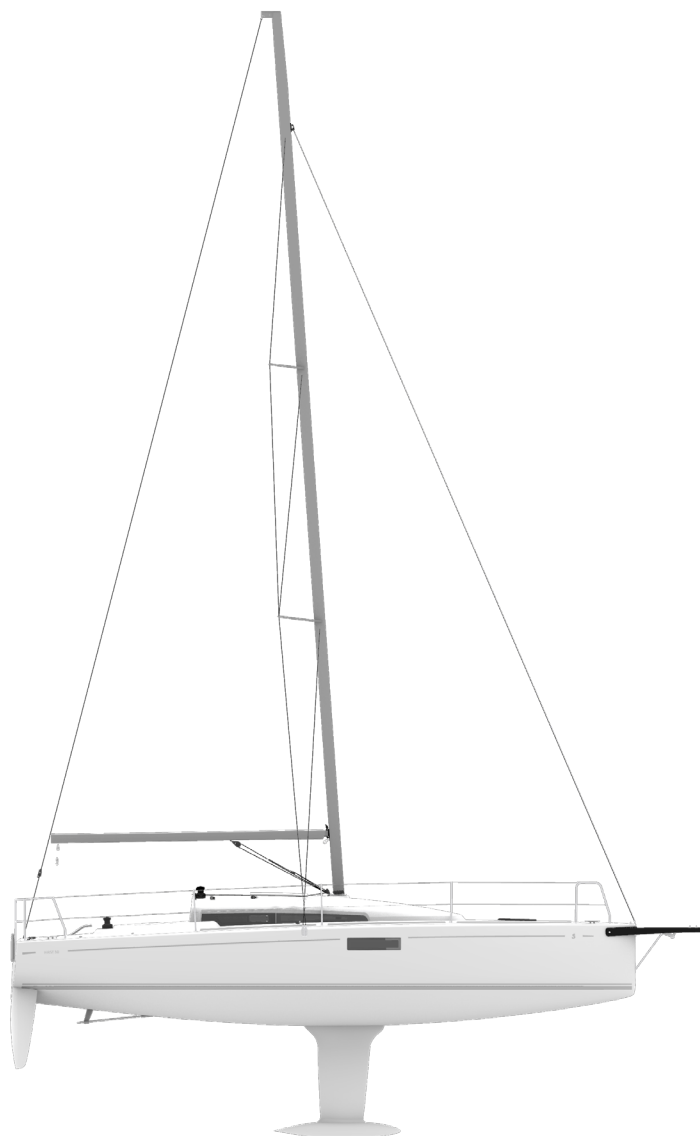

GENERAL SPECIFICATIONS

• L.O.A.	10,33 m	33'11"
• Hull length	9,35 m	30'8"
• L.W.L.	8,75 m	28'9"
• Beam	2,99 m	9'9"
• Light displacement (MLC*)	3040 kg	6700 lbs
• Standard keel weight	1070 kg	2360 lbs
• Standard keel draft	1,98 m	6'6"
• Shallow keel weight	1320 kg	2910 lbs
• Shallow keel draft	1,68 m	5'6"
• Engine power (shaft drive)	14 HP	14 HP
• Fuel capacity	40 L	10.5 US gal
• Fresh water capacity	100 L	26.4 US gal
• EC Certification	A4/B6	

RIG & SAILS DIMENSIONS

• Mast length	13,00 m	42'8"
• Air draft (excluding instruments)	14,70 m	48'3"
• Sail area upwind	54,7 m ²	588 ft ²
• Sail area downwind	127,7 m ²	1374 ft ²
• Mainsail	28,2 m ²	304 ft ²
• Jib	26,5 m ²	285 ft ²
• Masthead gennaker	99,5 m ²	1071 ft ²
• Fractional gennaker	86,0 m ²	926 ft ²
• Fractional furling gennaker	68,0 m ²	732 ft ²

DESIGN TEAM

- Naval architecture: Samuel MANUARD
- Design: Lorenzo ARGENTO
- Structural engineering: Pure Design & Engineering
- Interior design: SITO
- Concept and R&D: BENETEAU & Seascope

seanapps